


OSI model

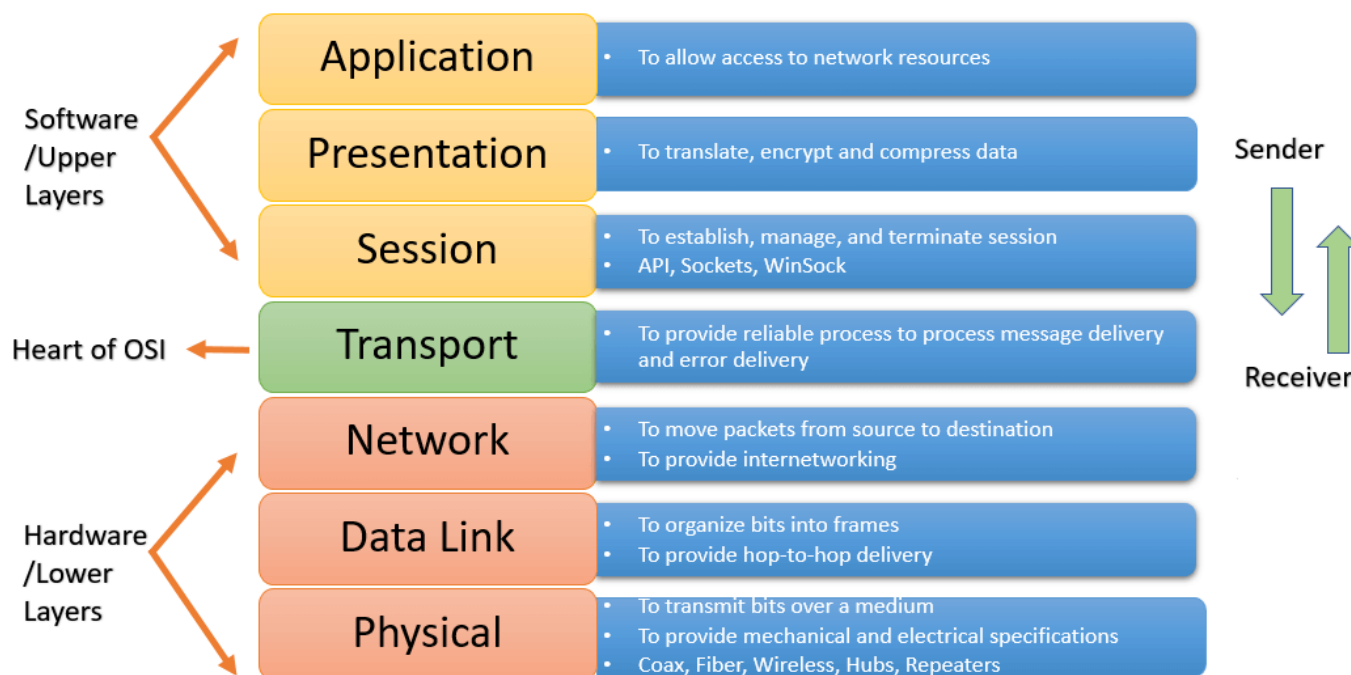

Physical Layer

The physical layer helps you to define the electrical and physical specifications of the data connection. This level establishes the relationship between a device and a physical transmission medium. The physical layer is not concerned with protocols or other such higher-layer items.

Examples of hardware in the physical layer are network adapters, ethernet, repeaters, networking hubs, etc.

Data Link Layer

Data link layer corrects errors which can occur at the physical layer. The layer allows you to define the protocol to establish and terminates a connection between two connected network devices.

It is IP address understandable layer, which helps you to define logical addressing so that any endpoint should be identified.

The layer also helps you implement routing of packets through a network. It helps you to define the best path, which allows you to take data from the source to the destination.

The data link layer is subdivided into two types of sublayers:

- Media Access Control (MAC) layer- It is responsible for controlling how device in a network gain access to medium and permits to transmit data.

- Logical link control layer- This layer is responsible for identity and encapsulating network-layer protocols and allows you to find the error.

Important Functions of Datalink Layer:

- Framing which divides the data from Network layer into frames.
- Allows you to add header to the frame to define the physical address of the source and the destination machine
- Adds Logical addresses of the sender and receivers
- It is also responsible for the sourcing process to the destination process delivery of the entire message.
- It also offers a system for error control in which it detects retransmits damage or lost frames.
- Datalink layer also provides a mechanism to transmit data over independent networks which are linked together.

Transport Layer

The transport layer builds on the network layer to provide data transport from a process on a source machine to a process on a destination machine. It is hosted using single or multiple networks, and also maintains the quality of service functions.

It determines how much data should be sent where and at what rate. This layer builds on the message which are received from the application layer. It helps ensure that data units are delivered error-free and in sequence.

Transport layer helps you to control the reliability of a link through flow control, error control, and segmentation or desegmentation.

The transport layer also offers an acknowledgment of the successful data transmission and sends the next data in case no errors occurred. TCP is the best-known example of the transport layer. Important functions of Transport Layers:

- It divides the message received from the session layer into segments and numbers them to make a sequence.
- Transport layer makes sure that the message is delivered to the correct process on the destination machine.
- It also makes sure that the entire message arrives without any error else it should be retransmitted.

Network Layer

The network layer provides the functional and procedural means of transferring variable length data sequences from one node to another connected in "different networks".

Message delivery at the network layer does not give any guaranteed to be reliable network layer protocol.

Layer-management protocols that belong to the network layer are:

- routing protocols
- multicast group management
- network-layer address assignment.

Session Layer

Session Layer controls the dialogues between computers. It helps you to establish starting and terminating the connections between the local and remote application.

This layer request for a logical connection which should be established on end user's requirement. This layer handles all the important log-on or password validation.

Session layer offers services like dialog discipline, which can be duplex or half-duplex. It is mostly implemented in application environments that use remote procedure calls. Important function of Session Layer:

- It establishes, maintains, and ends a session.
- Session layer enables two systems to enter into a dialog
- It also allows a process to add a checkpoint to steam of data.

Presentation Layer

Presentation layer allows you to define the form in which the data is to exchange between the two communicating entities. It also helps you to handles data compression and data encryption.

This layer transforms data into the form which is accepted by the application. It also formats and encrypts data which should be sent across all the networks. This layer is also known as a syntax layer. The function of Presentation Layers:

- Character code translation from ASCII to EBCDIC.
- Data compression: Allows to reduce the number of bits that needs to be transmitted on the network.
- Data encryption: Helps you to encrypt data for security purposes — for example, password encryption.
- It provides a user interface and support for services like email and file transfer.

Application Layer

Application layer interacts with an application program, which is the highest level of OSI model. The application layer is the OSI layer, which is closest to the end-user. It means OSI application layer allows users to interact with other software application.

Example of the application layer is an application such as file transfer, email, remote login, etc.

Application layer interacts with software applications to implement a communicating component. The interpretation of data by the application program is always outside the scope of the OSI model.

The function of the Application Layers are:

- Application-layer helps you to identify communication partners, determining resource availability, and synchronizing communication.
- It allows users to log on to a remote host
- This layer provides various e-mail services
- This application offers distributed database sources and access for global information about various objects and services.

Typical protocols per layer


- Application **SMTP, HTTP, FTP, POP3, SNMP**
- Presentation **MPEG, ASCH, SSL, TLS**
- Session **NetBIOS, SAP**
- Transport **TCP, UDP**
- Network **IPV5, IPV6, ICMP, IPSEC, ARP, MPLS**
- Data link **RAPA, PPP, Frame Relay, ATM, Fiber Cable**
- Physical **RS232, 100BaseTX, ISDN, 11**

Interaction Between OSI Model Layers

Information sent from a one computer application to another needs to pass through each of the OSI layers.

This is explained in the below-given example:


- Every layer within an OSI model communicates with the other two layers which are below it and its peer layer in some another networked computing system.
- In the below-given diagram, you can see that the data link layer of the first system communicates with two layers, the network layer and the physical layer of the system. It also helps you to communicate with the data link layer of, the second system.

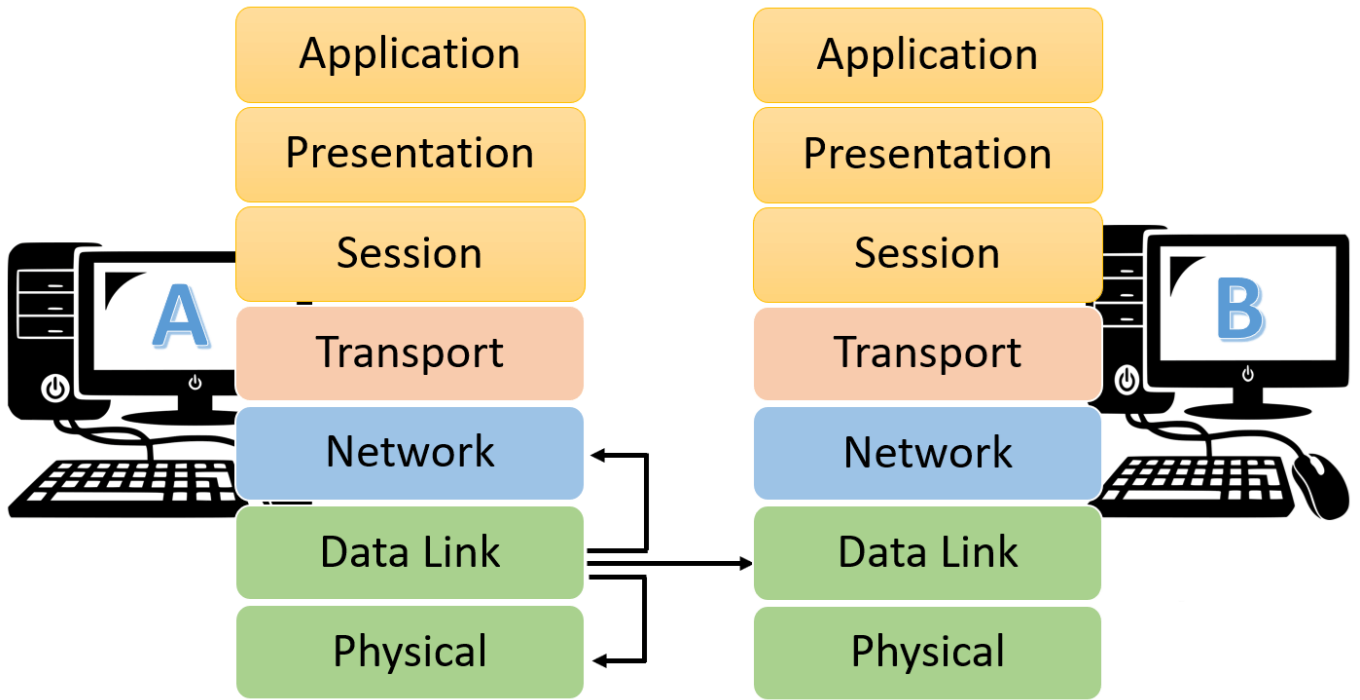

Differences between OSI & TCP/IP

OSI Reference Model

TCP/IP Conceptual Layers

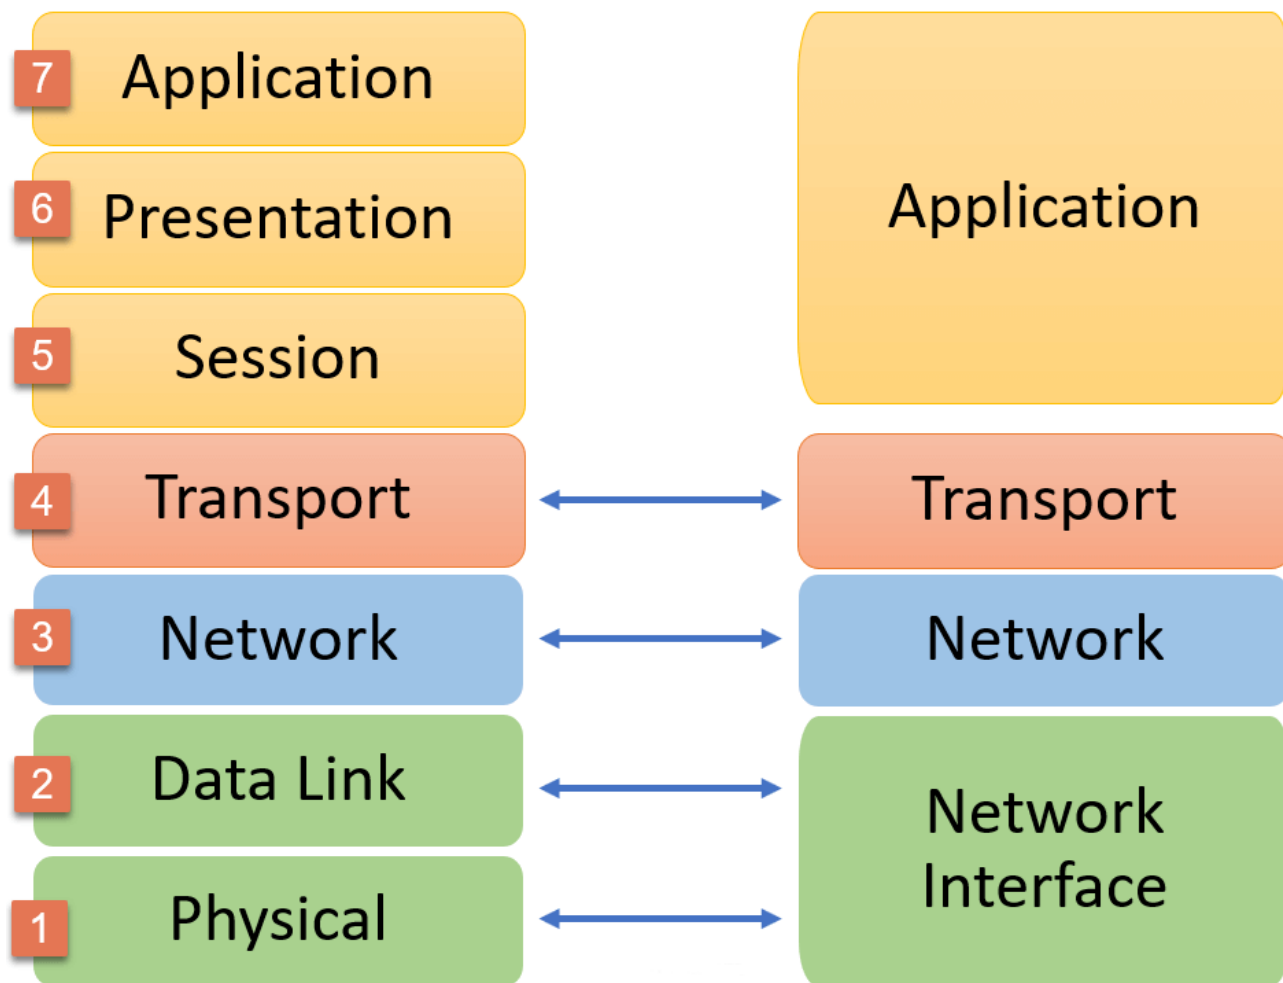

OSI Model	TCP/IP model
OSI model provides a clear distinction between interfaces, services, and protocols.	TCP/IP doesn't offer any clear distinguishing points between services, interfaces, and protocols.
OSI uses the network layer to define routing standards and protocols.	TCP/IP uses only the Internet layer.
OSI model use two separate layers physical and data link to define the functionality of the bottom layers	TCP/IP uses only one layer (link).
OSI model, the transport layer is only connection-oriented.	A layer of the TCP/IP model is both connection-oriented and connectionless.
In OSI model, data link layer and physical are separate layers.	In TCP data link layer and physical layer are combined as a single host-to-network layer.
The minimum size of the OSI header is 5 bytes.	Minimum header size is 20 bytes.

Advantages of the OSI Model

- It helps you to standardize router, switch, motherboard, and other hardware
- Reduces complexity and standardizes interfaces
- Facilitates modular engineering
- Helps you to ensure interoperable technology
- Helps you to accelerate the evolution

- Protocols can be replaced by new protocols when technology changes.
- Provide support for connection-oriented services as well as connectionless service.
- It is a standard model in computer networking.
- Supports connectionless and connection-oriented services.
- Offers flexibility to adapt to various types of protocols

Disadvantages of the OSI Model

- Fitting of protocols is a tedious task.
- You can only use it as a reference model.
- Doesn't define any specific protocol.
- In the OSI network layer model, some services are duplicated in many layers such as the transport and data link layers
- Layers can't work in parallel as each layer need to wait to obtain data from the previous layer.

Summary

- The OSI Model is a logical and conceptual model that defines network communication which is used by systems open to interconnection and communication with other systems
- In OSI model, layer should only be created where the definite levels of abstraction are needed.
- OSI layer helps you to understand communication over a network
- In 1984, the OSI architecture was formally adopted by ISO as an international standard

Layer	Name	Function	Protocols
7	Application	To allow access to network resources.	SMTP, HTTP, FTP, POP3, SNMP
6	Presentation	To translate, encrypt and compress data.	MPEG, ASCH, SSL, TLS
5	Session	To establish, manage, and terminate the session	NetBIOS, SAP
4	Transport	The transport layer builds on the network layer to provide data transport from a process on a source machine to a process on a destination machine.	TCP, UDP
3	Network	To provide internetworking To move packets from source to destination	IPV5, IPV6, ICMP, IPSEC, ARP, MPLS.
2	Data Link	To organize bits into frames To provide hop-to-hop delivery	RAPA, PPP, Frame Relay, ATM, Fiber Cable, etc.
1	Physical	To transmit bits over a medium To provide mechanical and electrical specifications	RS232, 100BaseTX, ISDN, 11.

From:
<https://wiki.plecko.hr/> - **Eureka Moment**

Permanent link:
<https://wiki.plecko.hr/doku.php?id=general:networking:osi>

Last update: **2021/03/07 22:27**

